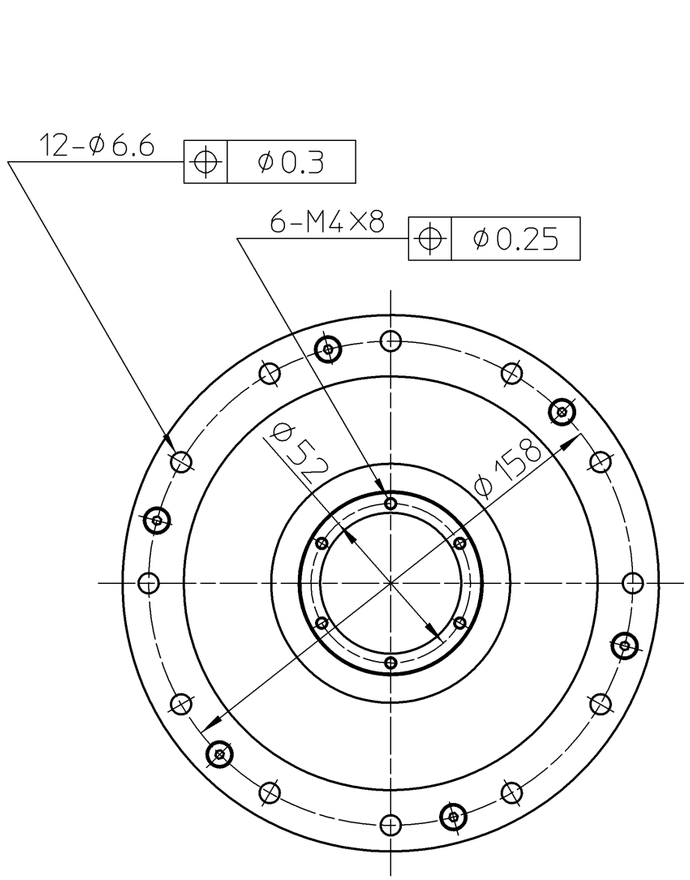

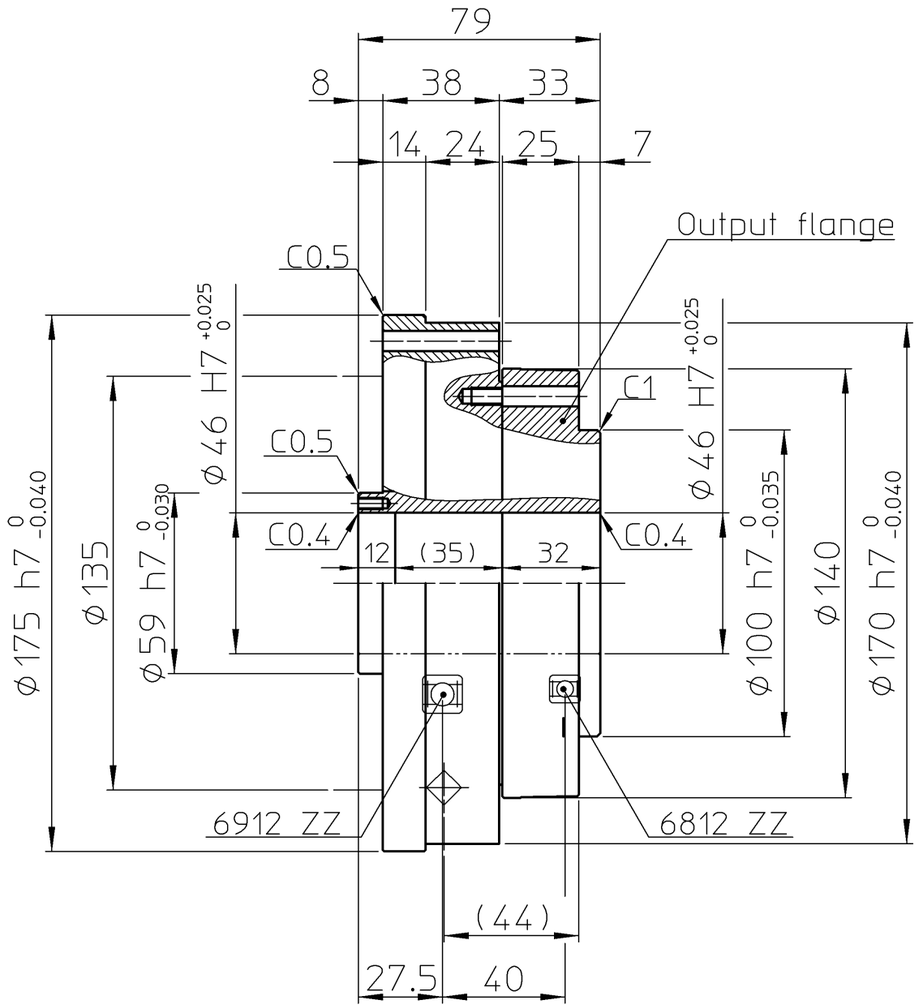

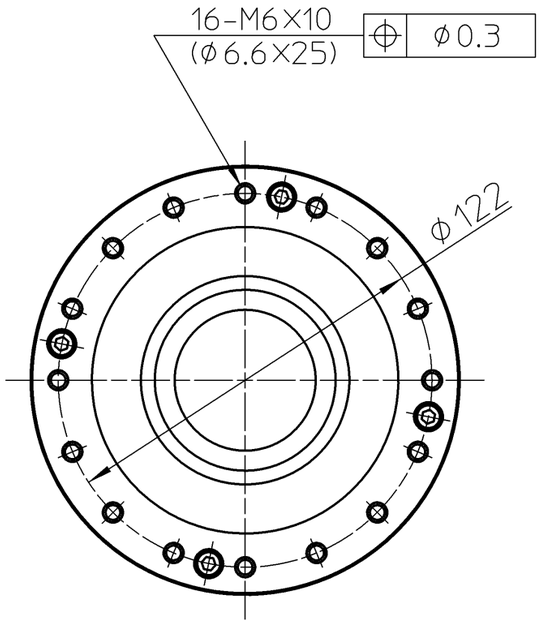

Rated Torque at 2000r/min	Limit for Repeated Peak Torque	Limit for Average Torque	Limit for Momentary Peak Torque
265 N·m	568 N·m	372 N·m	1080 N·m

PROPRIETORSHIP
This drawing (document) is the **PROPERTY** of Harmonic Drive Systems,Inc. and shall not be traced, otherwise copied or used for purposes other than agreed upon, nor communicated to any third party without written permission of Harmonic Drive Systems,Inc.

REMARKS

Lubrication : Harmonic Drive　　Harmonic Grease SK-1A
Cross Roller Bearing　Harmonic Grease 4B No.2
Designing and/or Handling of Harmonic Drive Gears (Harmonic Actuators) has to comply with technical information shown in Harmonic Drive Catalog.

CUSTOMER DRAWING NO.

訂正 REV		来歴 DESCRIPTION									
仕様 SPEC										尺度 SCALE	1:2
機械加工無記号公差	0 ～ 0.5	0.5 ～ 6	6 ～ 30	30 ～ 120	120 ～ 315	315 ～ 1000	1000 ～ 2000	備考 REMARKS : 特記無き角はC0．2以下、すみの丸みはR0．4以下			
GENERAL TOLERANCE	±0.05	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	無記号表面アラサ SURFACES MARKED EXCEPT AS NOTED ▽→▽ 50S　▽▽→▽▽ 25S　▽▽▽→▽▽▽ 6.3S			

DWG SIZE	UNIT	THIRD ANG
A3	mm	

設計 DESIGN	S.Momose	Oct-31-'12	タイトル TITLE ASSEMBLY DRAWING
検図 VRFD	H.Tukahara	Oct-31-'12	製品名 ARTICLE SHF-40-100-2UH-LW
承認 APPD	T.Yamagishi	Oct-31-'12	

HARMONIC DRIVE SYSTEMS INC TOKYO JAPAN

図番 DWG No C2A4213 －

本図は（株）ハーモニック・ドライブ・システムズの所有に係わるものです．許可なく第3者に見せたり、トレースその他の複写及び指定された用途以外には使用しないで下さい．