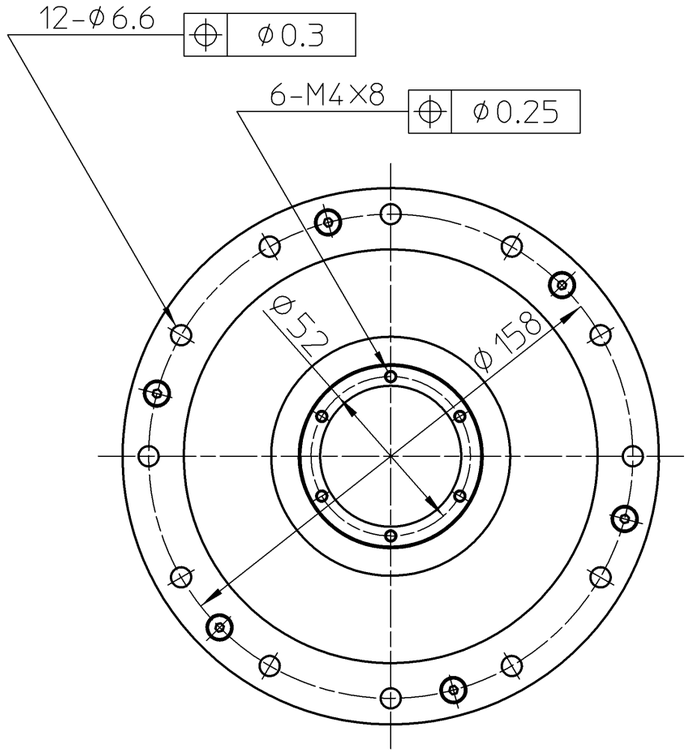


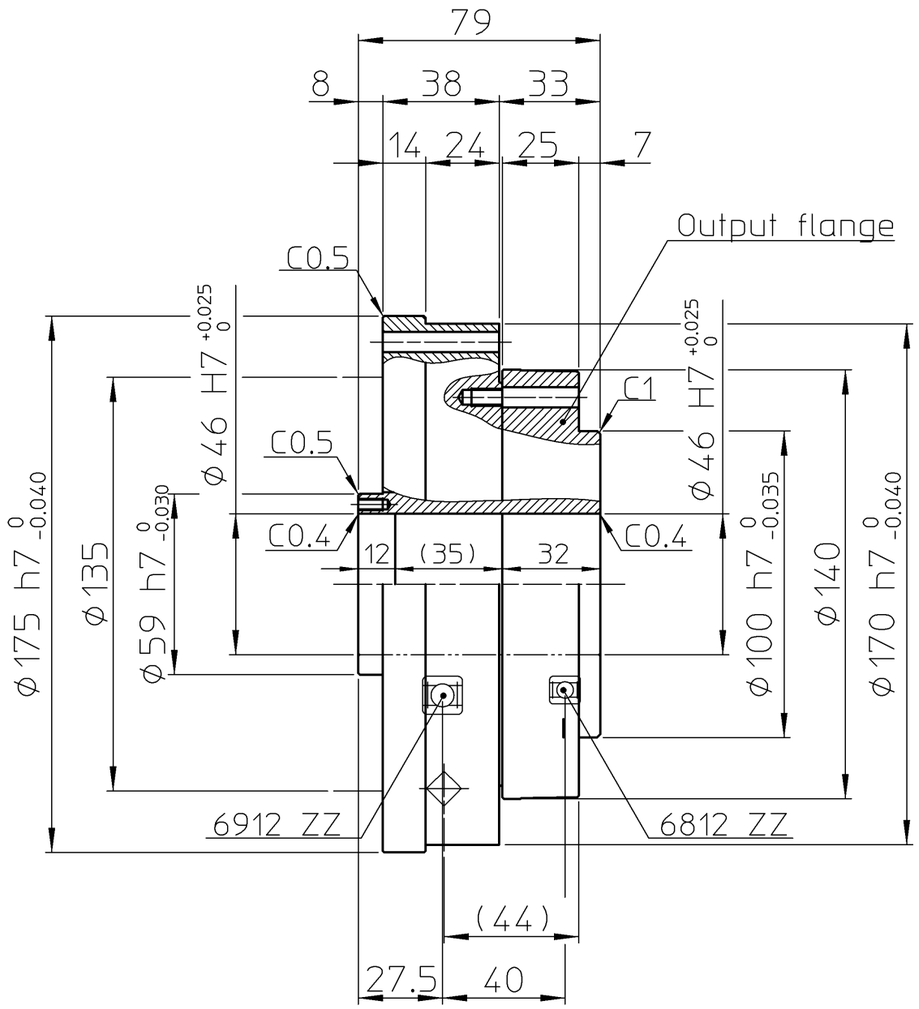


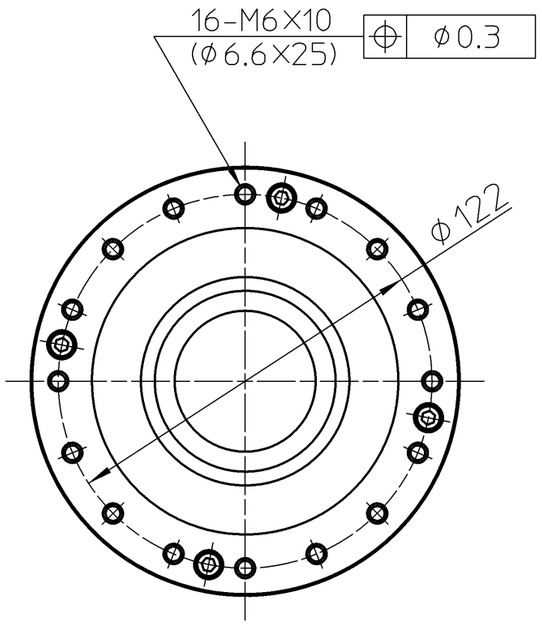


| Rated Torque at 2000r/min | Limit for Repeated Peak Torque | Limit for Average Torque | Limit for Momentary Peak Torque |
|---|---|---|---|
| 345 N·m | 738 N·m | 484 N·m | 1400 N·m |

**PROPRIETORSHIP**
This drawing (document) is the **PROPERTY** of Harmonic Drive Systems,Inc. and shall not be traced, otherwise copied or used for purposes other than agreed upon, nor communicated to any third party without written permission of Harmonic Drive Systems,Inc.

REMARKS

Lubrication : Harmonic Drive　　Harmonic Grease SK-1A
Cross Roller Bearing　Harmonic Grease 4B No.2
Designing and/or Handling of Harmonic Drive Gears (Harmonic Actuators) has to comply with technical information shown in Harmonic Drive Catalog.

| CUSTOMER DRAWING NO. |
|---|
| |
| |
| |
| |
| |

| 訂正 REV | | 来歴 DESCRIPTION | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 仕様 SPEC | | | | | | | | | | 尺度 SCALE | 1:2 |
| 機械加工無記号公差 | 0 ~ 0.5 | 0.5 ~ 6 | 6 ~ 30 | 30 ~ 120 | 120 ~ 315 | 315 ~ 1000 | 1000 ~ 2000 | 備考 REMARKS | ： 特記無き角はCO．2以下，すみの丸みはRO．4以下 | | |
| GENERAL TOLERANCE | ±0.05 | ±0.1 | ±0.2 | ±0.3 | ±0.5 | ±0.8 | ±1.2 | 無記号表面アラサ SURFACES MARKED EXCEPT AS NOTED | ▽ → 50S　▽▽ → 25S　▽▽▽ → 6.3S | | |

| DWG SIZE | UNIT | THIRD ANG |
|---|---|---|
| A3 | mm | |

| | | | |
|---|---|---|---|
| 設計 DESIGN | S.Momose | Oct-24-'12 | タイトル TITLE: ASSEMBLY DRAWING |
| 検図 VRFD | H.Tukahara | Oct-24-'12 | 製品名 ARTICLE: SHG-40-100-2UH-LW |
| 承認 APPD | T.Yamagishi | Oct-24-'12 | |

HARMONIC DRIVE SYSTEMS INC TOKYO JAPAN

図番 DWG No: C2A4450 —

本図は（株）ハーモニック・ドライブ・システムズの所有に係わるものです．許可なく第3者に見せたり、トレースその他の複写及び指定された用途以外には使用しないで下さい．